


TRUCKMASTER®

I-Beam Concrete Deck

Truck Scale Overview

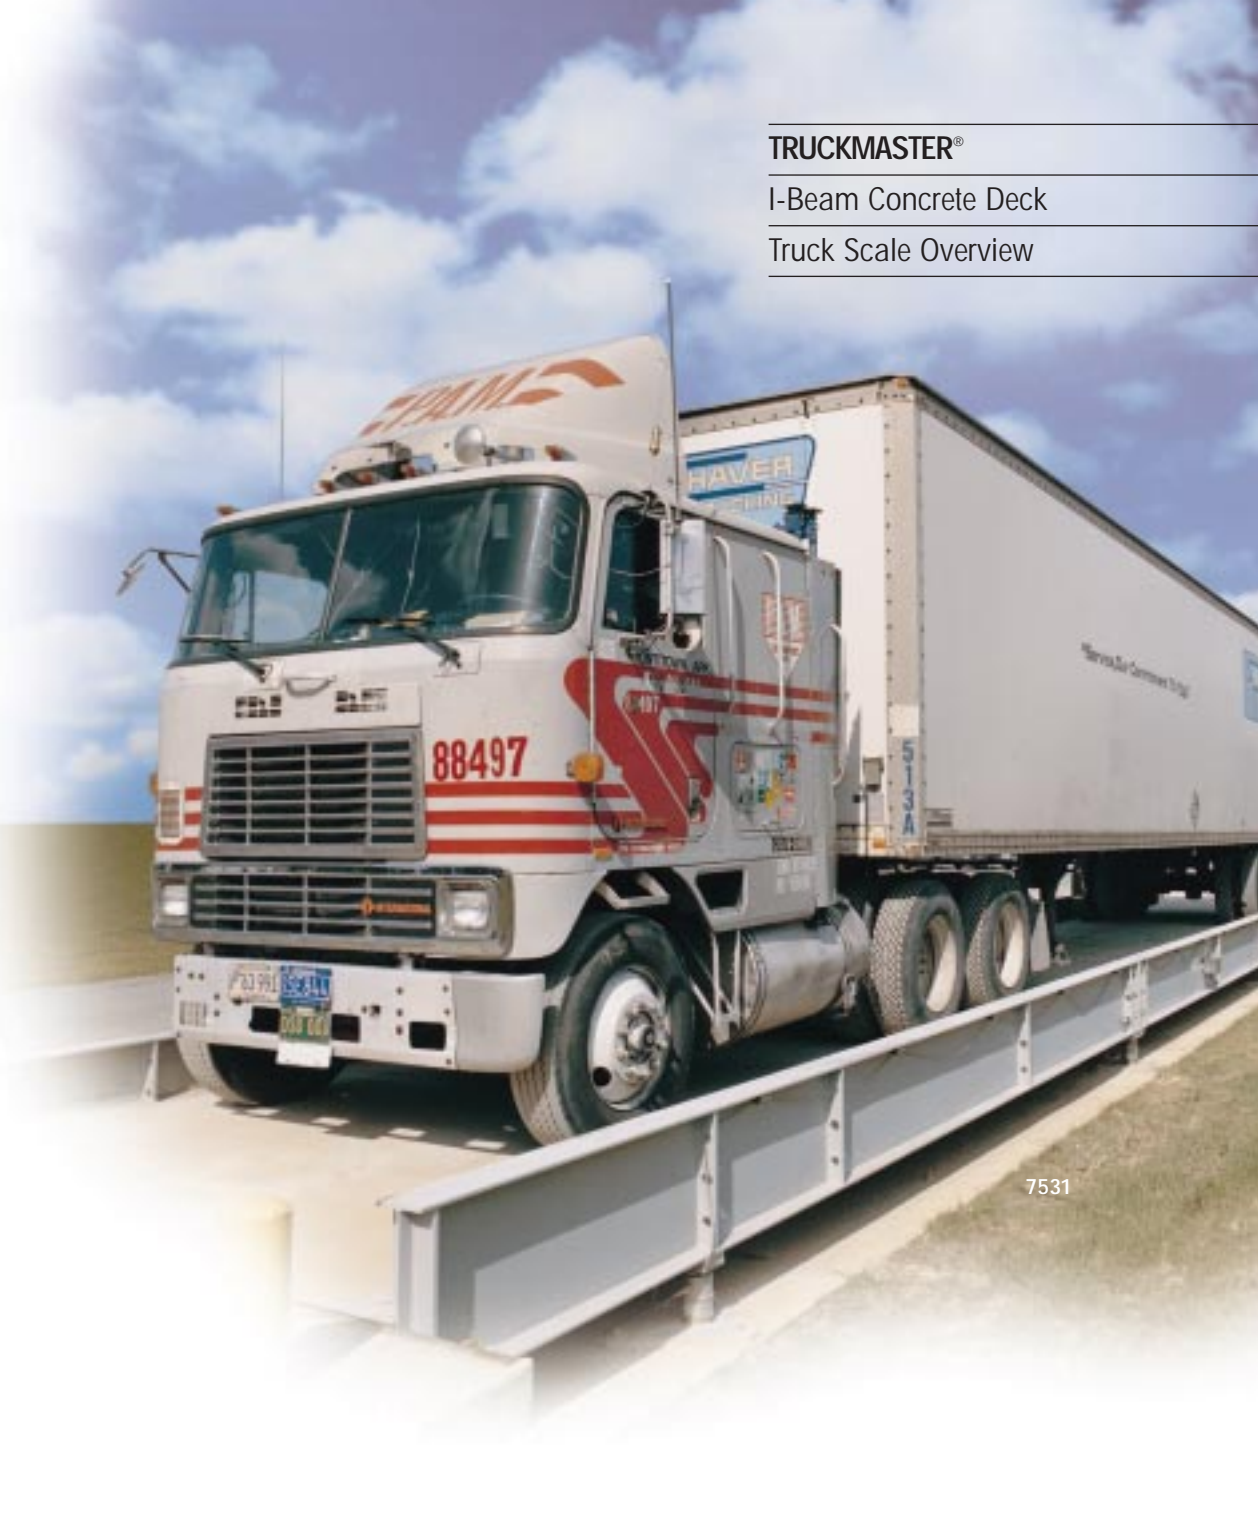

7531

**Provides Accurate, Reliable Weights at
Low Cost for Over-The-Road Vehicles**

METTLER TOLEDO




Knock down design provides easy shipping

POWERCELL® Load Cells Are Used to Ensure Accurate Weights, Reliable Service

Over-The-Road I-Beam Concrete Deck Product Matrix

Model	Profile	Width	Length	CLC	Capacity	Cell Type	Duty Cycle	Finish	NTEP COC #
7531	19.5"	10' or 11'	10' to 160'	60,000 lb	200,000 lb*	22.5t POWERCELL	Commercial	Standard	92-204
7541	32"	10'	10' to 160'	60,000 lb	200,000 lb*	22.5t POWERCELL	Commercial	Standard	90-046

*Scales ≤25' will have a capacity of 140,000 lb



Two Truckmaster vehicle scale models give you a choice that will meet your exact application needs. Choose the model 7531 for above ground installation or the model 7541 for installation in a pit. Both designs incorporate our POWERCELL® digital transducer technology, the proven ruggedness of a beam structure, and the durability of a reinforced concrete deck for unbeatable long-term accuracy and reliability.

The model 7531 incorporates the main girders as integral side rails for a strong, cost-effective above-ground design. With its 8" thick concrete deck, supported by wide flange main beams, this Truckmaster scale easily handles the heaviest over-the-road traffic without the need for a pit.

The model 7541 installs flush in a pit and is ideal for sites where overhead clearance or restricted space is a concern. Its versatile design allows it to be easily adapted to accept grain dumps or to be installed in existing pits.

The steel reinforced concrete deck is contained within a 6" C-channel deck frame supported by wide flange beams. Depending upon the length of the scale, one or two manholes are provided for easy access to the foundation.

Approvals


TRUCKMASTER scales meet or exceed requirements in accordance with the National Institute of Standards and Technology (NIST) Handbook 44. The Certificate of Conformance (CoC) is identified in the product matrix. These scales have also received Factory Mutual System approval for use in hazardous areas when used with other approved METTLER TOLEDO hazardous area devices.

ISO 9001

This product was developed, produced and tested in a METTLER TOLEDO facility that has been audited and registered according to international (ISO 9001) quality standards.



For questions on I-beam concrete deck truck scales and technical matters, call your authorized METTLER TOLEDO distributor. Or visit our website: www.mt.com.

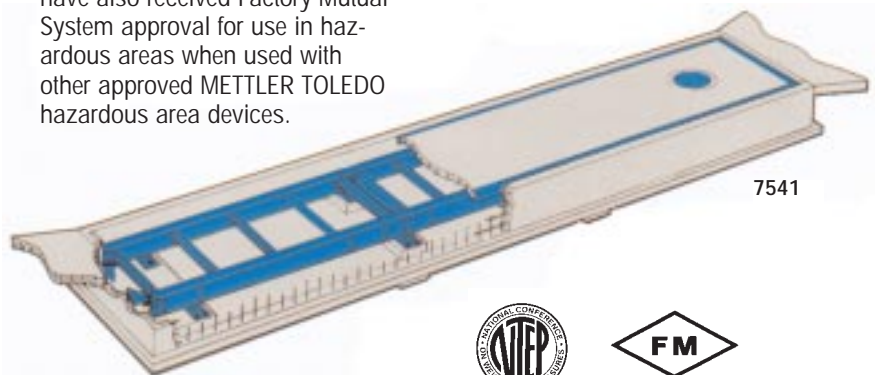

7541



	TEL	FAX		TEL	FAX	
METTLER TOLEDO	Australia (61) 3 9644 5700	(61) 3 9645 3935	Korea	(82-2) 518-2004	(82-2) 518-0813	Internet
USA & Canada	Austria (43-1) 604 1980	(43-1) 604 2880	Malaysia	(60-3) 703 2773	(60-3) 703 8773	www.mt.com
1900 Polaris Parkway	Belgium (32-2) 334 0211	(32-2) 378 1665	Mexico	(52-5) 547 5700	(52-5) 541 2228	Specifications subject to change without notice.
Columbus, Ohio 43240	Brazil (55-11) 421 5737	(55-11) 7295-1692	Netherlands	(31-344) 638363	(31-344) 638390	© 1999 Mettler-Toledo, Inc.
TEL (800) 786-0038	China (Industrial) (86-519) 6642040	(86-519) 6641991	Norway	(47-22) 30 44 90	(47-22) 32 70 02	METTLER TOLEDO®, POWERCELL® and MTX™
(614) 438-4511	China (Systems) (86-21) 6485-0435	(86-21) 6485-3351	Poland	(48-22) 651 9232	(48-22) 42 20 01	are trademarks of Mettler-Toledo, Inc.
FAX (614) 438-4900	Croatia (385-1) 660 3009	(385-1) 660 2189*	Russia	(7-095) 921 9211	(7-095) 921 6353	Printed on recycled paper and is recyclable.
Headquarters	Czech Republic (420-2) 254962	(420-2) 24247583	Singapore	(65) 778 6779	(65) 778 6639	Printed in USA.
8606 Greifensee	Denmark (45-43) 27 08 00	(45-43) 27 08 28	Slovak Republic	(421-7) 525 2170	(421-7) 525 2173	15M0599
Switzerland	France (33-1) 30 97 17 17	(33-1) 30 97 16 16	Slovenia	(38-6) 6123-57 64	(38-6) 6127-4575*	TRUCK SCALES
TEL (41-1) 944 22 11	Germany (49-641) 50 70	(49-641) 52951	Spain	(34-3) 223 2222	(34-3) 223 0271	199-TR03187.0E
FAX (41-1) 944 30 60	Hungary (36) 1257 7030	(36) 1256 2175	Sweden	(46-8) 702 50 00	(46-8) 642 45 62	
	India (91-22) 857-0808	(91-22) 857-5071	Switzerland	(41-1) 944 45 45	(41-1) 944 45 10	
	Italy (39-2) 333321	(39-2) 356-2973	Taiwan	(886-2) 579-5955	(886-2) 579-5977	
	Japan (81-6) 949-5901	(81-6) 949-5944	Thailand	(66-2) 719 6480	(66-2) 719 6479	
	Kazakhstan (7-3272) 50 63 69	(7-3272) 60 88 35	United Kingdom	(44-116) 235 7070	(44-116) 236 6399	

*Ask for FAX.